


OmniTalk Quick Reference Guide

OmniTalk One-line ATA

- Basic Phone Functions
- Voice Mail
- Message Waiting Indicator (MWI)
- Three-way Calling
- OmniTalk Control Panel
- Feature List

SPA-1001

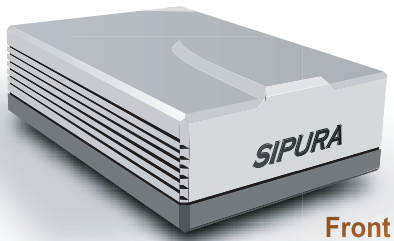

Basic Phone Functions

To make, answer or end a call, use your phone, speakerphone or headset as you always have. The Redial and Flash buttons also continue to work just like they did with your traditional phone service.

Voice Mail

To access or configure your voicemail, either dial 00 from your OmniTalk phone, or dial your OmniTalk Phone Number from any phone, then enter * when the voice prompt begins. Follow the instructions to configure or retrieve voicemail.

Message Waiting Indicator (MWI)

If you have unheard voicemail and your phone supports MWI, then the MWI light will blink. If your phone does not support MWI, you will hear a warbling dial tone when you go to place a call.

Three-way Calling

Place a call to the first party you wish to call. Next, press the Flash button, then call the second party. Once the second party answers, press the Flash button again to create a 3-way call.

OmniTalk Control Panel

Go to www.omni-talk.com, and click the "Sign in" button. Enter your OmniTalk Phone Number (with no dashes) and your Password. From here, you can configure and manage many OmniTalk features, including CallBlast and Local Dialing. In addition, you can retrieve your voicemails and your call detail records.

(*) Features

Press the star key (*), then the digits listed below to access the described Feature.

Key	Description
*69	Place a call to the number from which you were last called
*72<number>	Forward all calls to the <number> entered after 72
*73	Cancel forwarding of all calls
*92<number>	Forward all busy or unanswered calls to the <number> entered after 92
*93	Cancel forwarding of all busy or unanswered calls
*67	Block Caller ID for all outbound calls
*66	Unblock Caller ID for all outbound calls
*81<number>	Call to <number> with blocked Caller ID
*82<number>	Call to <number> with unblocked Caller ID
*77	Don't accept calls from anonymous callers (no Caller ID)
*87	Accept calls from anonymous callers (no Caller ID)
*78	Turn on Do Not Disturb (all calls go directly to voicemail)
*79	Cancel Do Not Disturb
*56	Enable Call Waiting on all calls
*57	Disable Call Waiting on all calls (for a fax or modem line)
*70<number>	Disable Call Waiting only for this call to <number> (for a single fax or modem call)
*71<number>	Enable Call Waiting only for this call to <number>